

PICO MAX SPECIFICATION

ITEM		PICO MAX
Wavelength & Operating Mode		1064nm / 532nm
		585nm / 650nm / 595nm / 660nm
Pluse Energy	1064nm	Max. 500mj
	532nm	Max. 250mj
	585/595nm	Max. 150mj
	650/660nm	Max. 100mj
Pulse Width	Nd : YAG	350ps
Spot Size		2~10mm,(1064 / 532nm)
		2mm-3mm (585/650nm/595/660)
Pluse Rate		Max. 2Hz-10Hz 585 / 650 : 1-2 Hz
Aiming Beam		Diode 650nm
Optional Handpiece		Dye Hand Piece (585,650nm / 595,660nm)
		Fractional Handpiece

PICO MAX


Good choice to change your skin destiny !
Now , Real “PICO”Laser !!

Stable Operating
Minimal pain

Convenient to Treat
Smart Protocols

No, Side Effect
Fast Treatment

PRODUCT VIEW

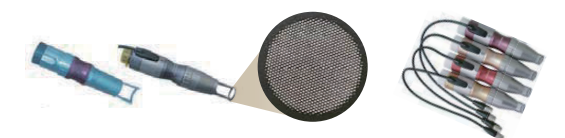

BEFORE & AFTER



HANDPIECE

- Zoom hand Piece (2~10mm, Standard)
- Fractional Hand Piece for 1064nm (Optional)
- Dye Hand Piece (585nm, optional)
- Dye Hand Piece (650nm, optional)
- Dye Hand Piece (595nm, optional)
- Dye Hand Piece (660nm, optional)

300-350ps

